



HEIGHT ADJUSTABLE DESKS


WHY WE CHOOSE ADJUSTABLE DESKS?

1. Reasons to choose a height adjustable desk

With the progress and development of society, the pressure of work increases, and irregular work and incorrect posture brings many troubles to people.

2. Advantages of a height adjustable desk

A height adjustable desk is an intellegent product for office and home use. It can be used to work sitting down and standing up, which contributes to a healthy work environment.



Intelligence



Lift function



Quality



Balance



CONTENTS

COMPANY PROFILE	01
1 HOT SELLING MODELS	03
2 DESK RISERS	11
3 SINGLE MOTOR MODELS	19
4 DUAL MOTOR MODELS	25
5 TRIPLE MOTOR MODELS	37
6 BENCHES	45
7 CRANK DESKS	53
8 ACCESSORIES	59
9 HANDSETS & CONTROL BOXES	67



COMPANY PROFILE

- We have a professional sales team and a research and development team

Ningbo AOKE Office Equipment Co. Ltd. A company founded in 2012, empowers people to have a more health-conscious workstation and has specialized in manufacturing linear actuators, lifting columns, height adjustable desk and some other ergonomic desk accessories for 6 years. For the fast extension, AOKE Europe was established in 2016 in the Netherlands to develop the European Market.

With the strict attitude "Green, Health, Comfort", we offer high qualified products to our customers.

Our 45000 sqm factory and professional equipment, containing Laser Cutting for Cube and Powder Painting Machine, is able to support high productivity. Inspection department safeguards quality as well as sophisticated R&D department continuously innovates and has developed a great number of patents. Our products are of best-in-class quality and have been certificated by UL962, CE, BIFMA, FCC, ROHS, EN527, CMC, CAS, SAA.

- Our company has a variety of certifications, some of them are specified below:



1


HOT SELLING MODELS

AK2YJRT-ZF3	05
AK02YJYT-A-F	07
AK02YJHT-AJ-H	09



AK2YJRT-ZF3

Dual motor desk frame

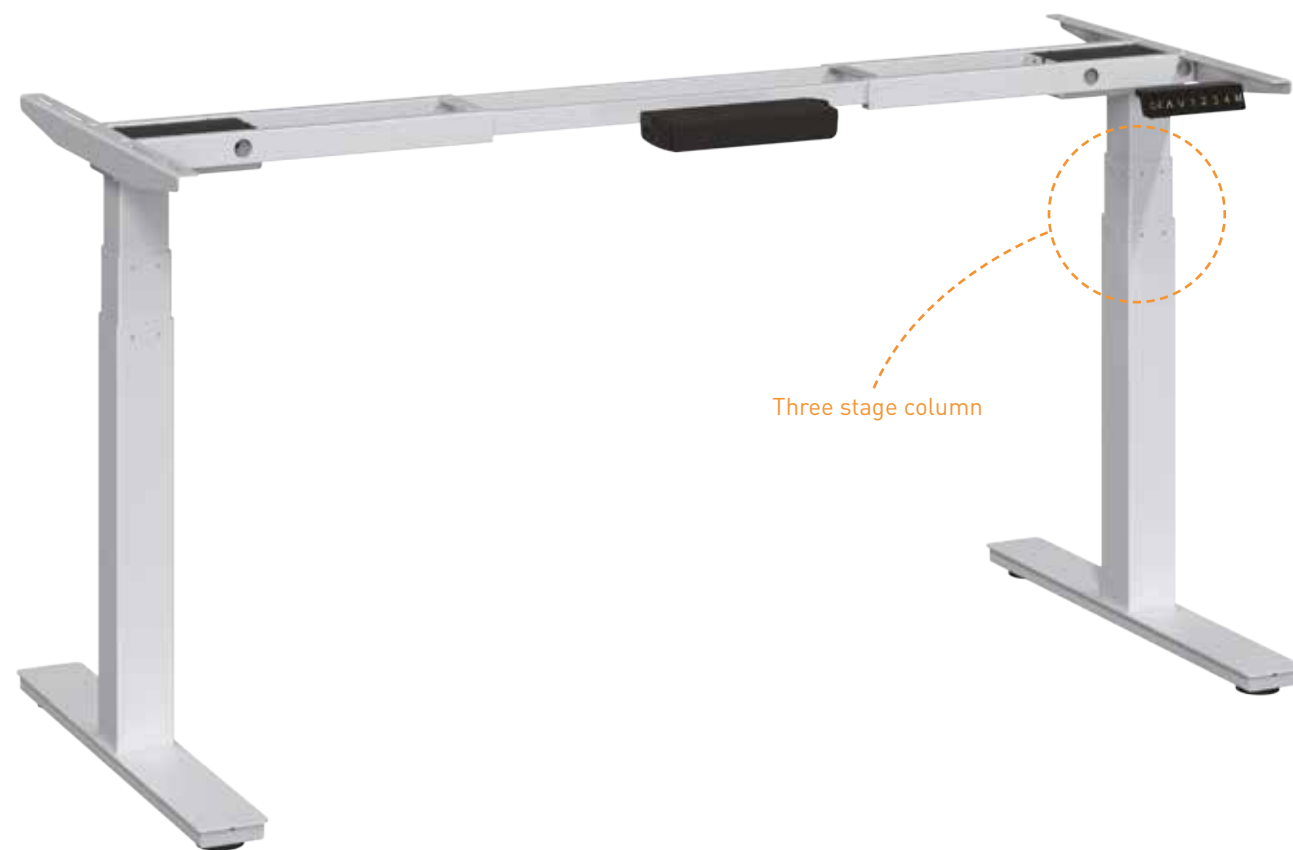

Hole free bracket



Free width adjustment



Leg fitting details



TC15 control box



TDH6 handset



Black, White & Aluminum

Parameters



Noise level
50 db



Input
110 - 230V



Warranty period
5 years



Black
(RAL9005)






White
(RAL9010)



Aluminum
(RAL9006)

Leg orientation: square
Height adjustable range: 625 - 1275 mm
Frame adjustable size: width (1075 - 1800) * depth (600) mm
Suitable table top size: width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity: 120 kg
Foot length: 700 mm
Max. speed: 40 mm/s

Product sizes

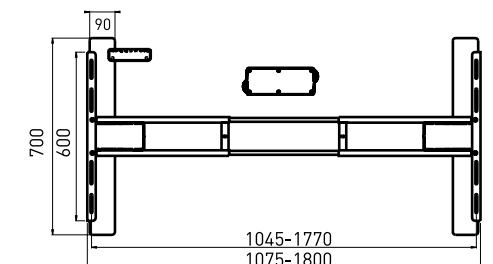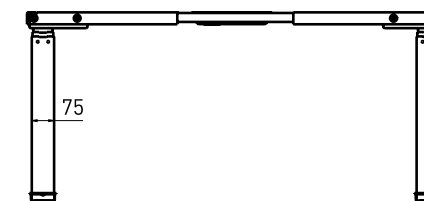


* Product design and data will be continuously developed and updated

AK02YJYT-A-F

Single motor desk frame

www.nbaoke.com | www.aoke-europe.com

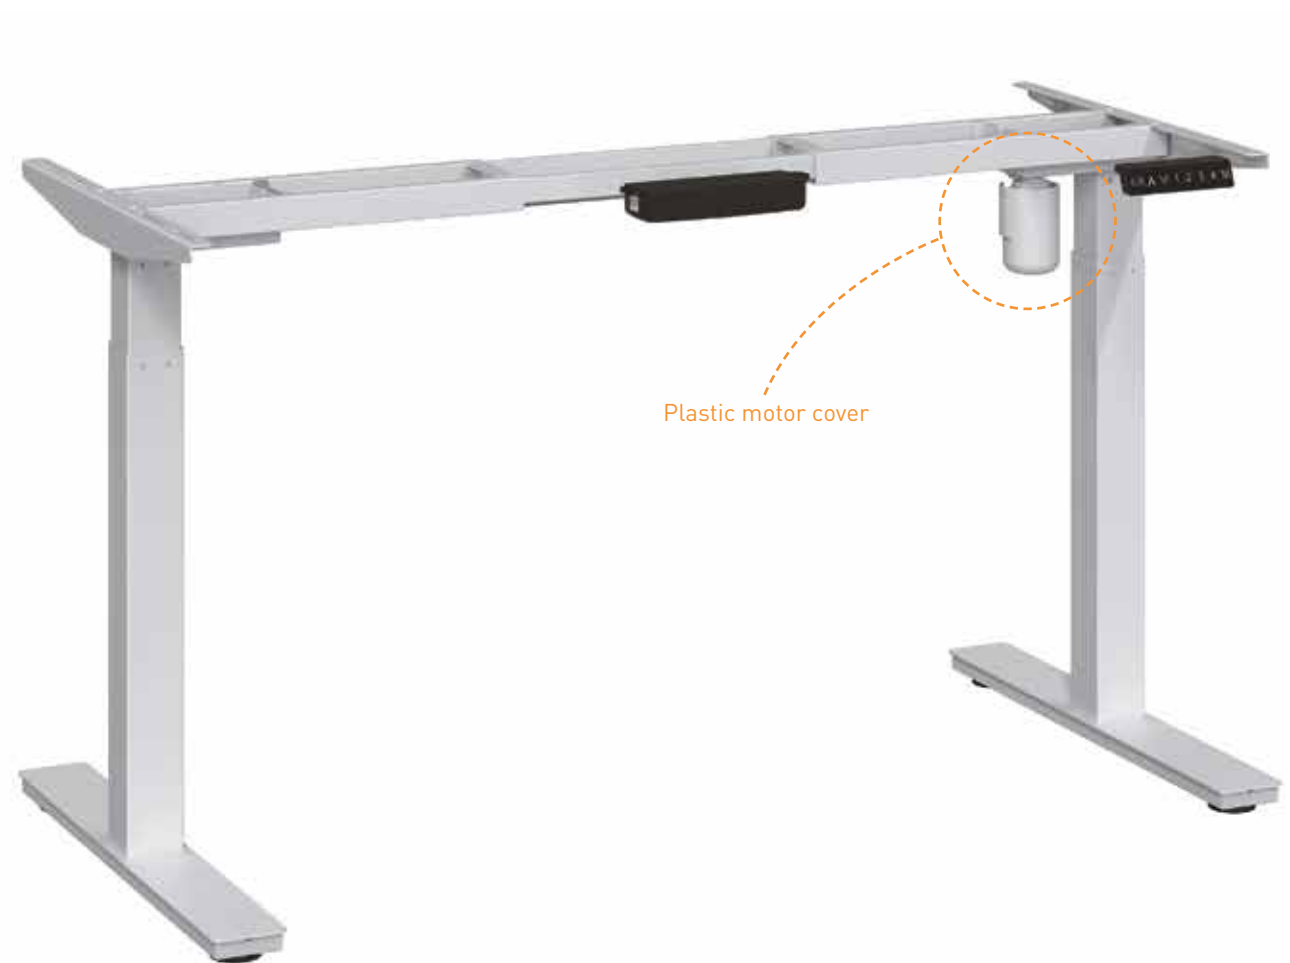

Hole free bracket



Free width adjustment



Single motor details



TC11 control box



TDH6 handset



Black, White & Aluminum

Parameters



Noise level
50 db



Input
110 - 230V



Warranty period
5 years

Leg orientation: square
Height adjustable range: 690 - 1150 mm
Frame adjustable size: width (1075 - 1720) * depth (600) mm
Suitable table top size: width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity: 100 kg
Foot length: 700 mm
Max. speed: 25 mm/s



Black
(RAL9005)




White
(RAL9010)



Aluminum
(RAL9006)

Product sizes

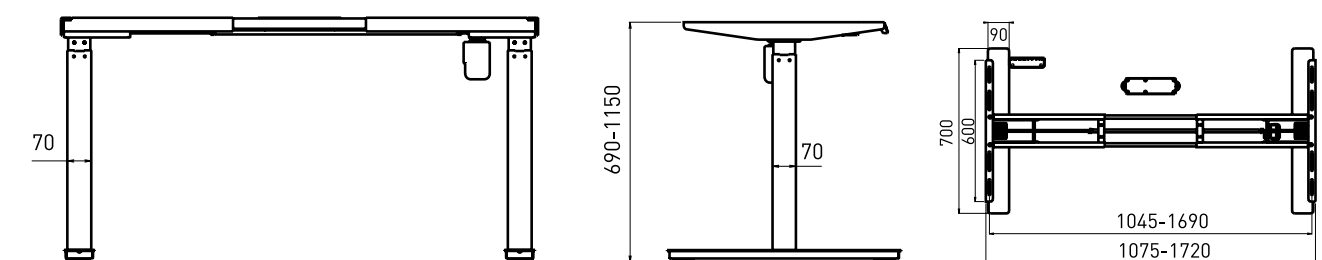


* Product design and data will be continuously developed and updated

AK02YJHT-AJ-H

Manually operated desk frame

www.nbaoke.com | www.aoke-europe.com

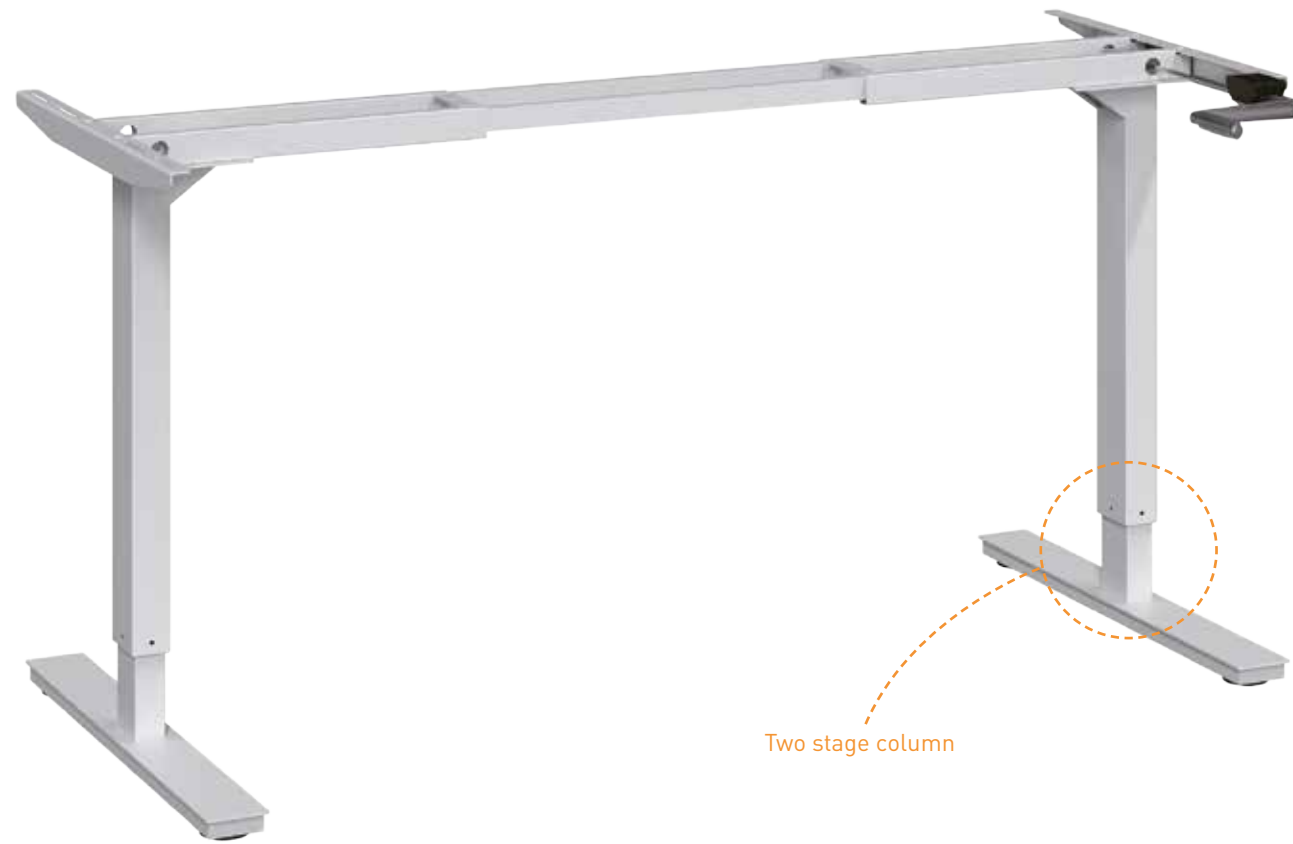

Two stage column



Hole free bracket



Free width adjustment



Hand crank details



Aluminum crank



Foldable hand crank



Black, White & Aluminum

Parameters



Noise level
50 db



Warranty period
5 years

Leg orientation: rectangular
Height adjustable range: 680 - 1130 mm
Frame adjustable size: width (1150 - 1800) * depth (600) mm
Suitable table top size: width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity: 80 kg
Foot length: 700 mm
Max. speed: 8 mm/turn



Black
(RAL9005)




White
(RAL9010)



Aluminum
(RAL9006)

Product sizes

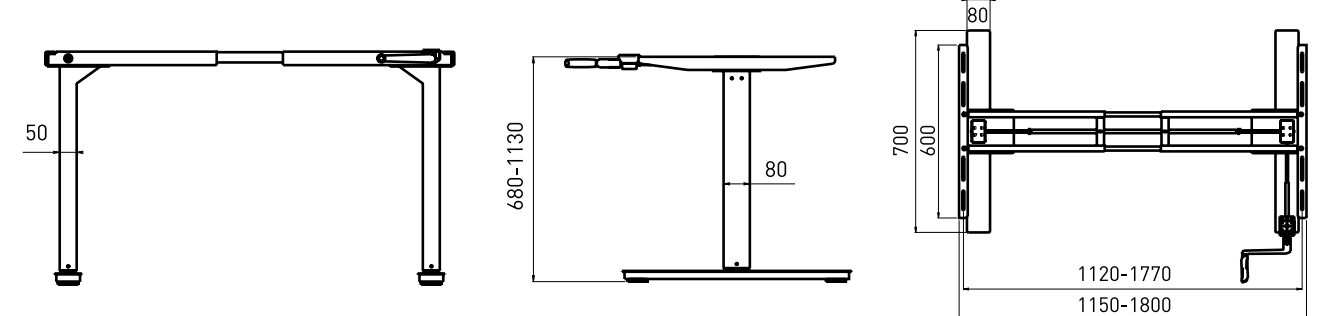

* Product design and data will be continuously developed and updated

2

DESK RISERS

AK-MR-E01S	13
AK-MR-E03	15
AK-MR-E04	17



AK-MR-E01S

Desk riser

Parameters

Leg orientation:	square
Height range for top:	145 - 575 mm
Height range for keyboard:	30 - 460 mm
Max. lifting capacity:	15 kg
Speed:	25 mm/s
Input:	110 - 230V
Noise level:	50 db
Warranty period:	5 years



TH14

Black
(RAL9005)

White
(RAL9010)

Aluminum
(RAL9006)



Double monitor mount




Triple monitor mount




Overview

Product Sizes

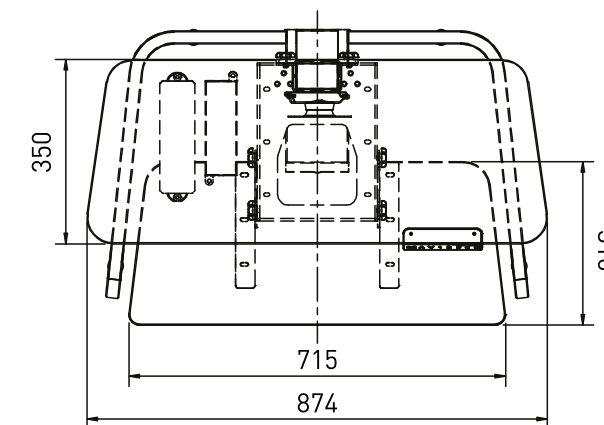


Dimensions overview - top

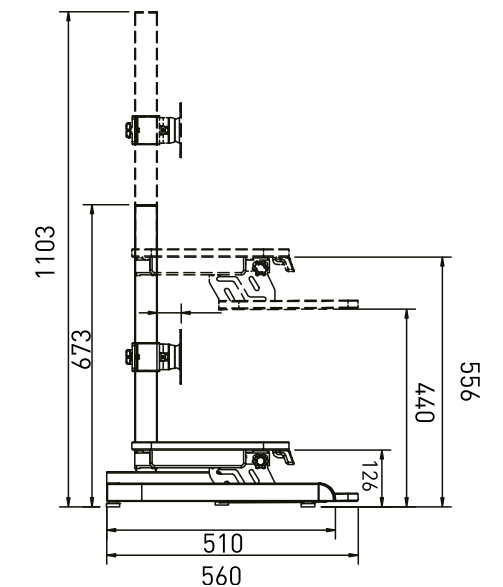

Dimensions overview - side

Packing Information

Dimensions:	945 (l) * 565 (w) * 230 (h) mm
Net weight:	26 kg
Gross weight:	28 kg
Container quantities:	- 20 GP / 160 sets - 40 GP / 320 sets - 40 HC / 384 sets

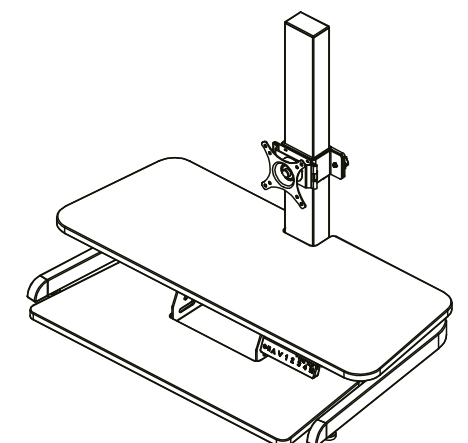

AK-MR-E03

Desk riser

www.nbaoke.com | www.aoke-europe.com

Parameters

Leg orientation:	square
Height range for top:	150 - 550 mm
Height range for keyboard:	20 - 420 mm
Max. lifting capacity:	15 kg
Speed:	25 mm/s
Input:	110 - 230V
Noise level:	50 db
Warranty period:	5 years



TH14

Black
(RAL9005)

White
(RAL9010)

Aluminum
(RAL9006)



Grooves to hold articles




Low position




High position

Detachable

Product Sizes

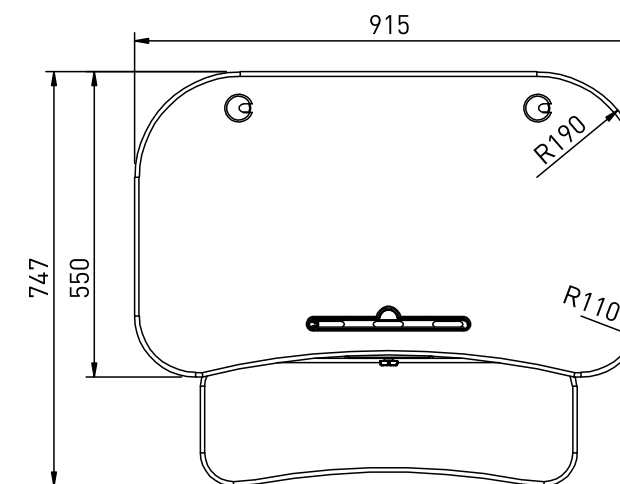


Dimensions overview - top

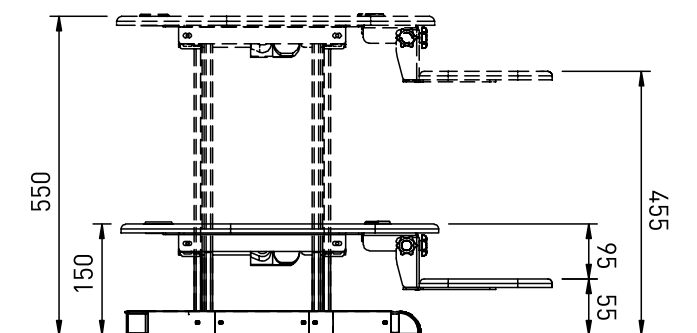

Dimensions overview - side

Packing Information

Dimensions:	984 (l) * 650 (w) * 260 (h) mm
Net weight:	27 kg
Gross weight:	29 kg
Container quantities:	- 20 GP / 162 sets - 40 GP / 324 sets - 40 HC / 374 sets

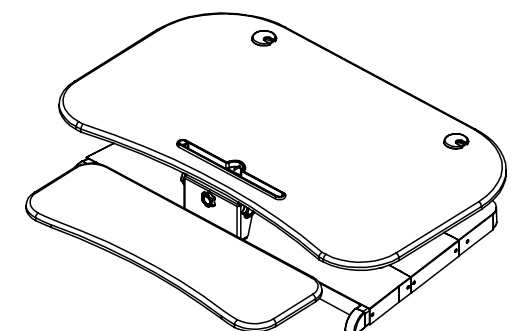

AK-MR-E04

Desk riser

www.nbaoke.com | www.aoke-europe.com

Parameters

Leg orientation:	square
Height range for top:	150 - 550 mm
Height range for keyboard:	20 - 420 mm
Max. lifting capacity:	15 kg
Speed:	25 mm/s
Input:	110 - 230V
Noise level:	50 db
Warranty period:	5 years



TH14

Black
(RAL9005)

White
(RAL9010)

Aluminum
(RAL9006)



Grooves to hold articles




Low position




High position

Product Sizes

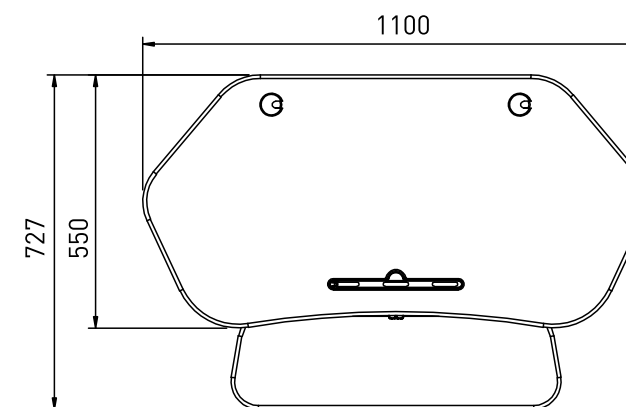


Dimensions overview - top

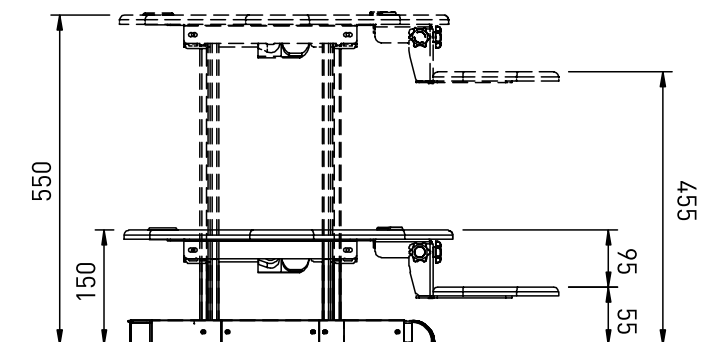

Dimensions overview - side

Packing Information

Dimensions:	1175 (l) * 705 (w) * 260 (h) mm
Net weight:	30 kg
Gross weight:	32 kg
Container quantities:	- 20 GP / 108 sets - 40 GP / 243 sets - 40 HC / 297 sets

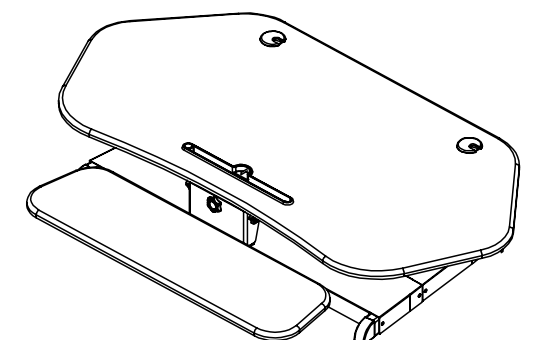

3

SINGLE MOTOR MODELS

AK02YJYT-A-F	21
AK02YJYT-AJ	23



AK02YJYT-A-F

Single motor desk frame



Parameters

		
Noise level	Input	Warranty period
50 db	110 - 230V	5 years


Leg orientation:	square
Height adjustable range:	690 - 1150 mm
Frame adjustable size:	width (1075 - 1720) * depth (600) mm
Suitable table top size:	width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity:	100 kg
Foot length:	700 mm
Max. speed:	25 mm/s

 Black
(RAL9005)


 White
(RAL9010)

 Aluminum
(RAL9006)


Product Sizes

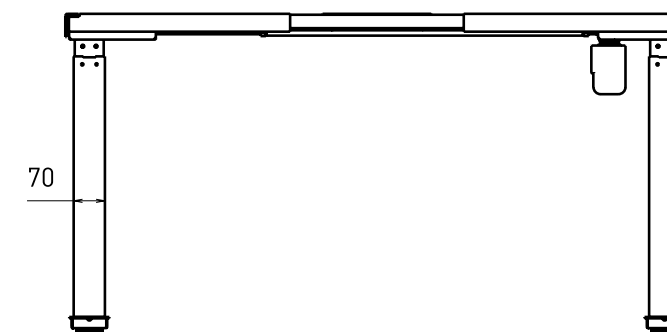

Dimensions overview - front

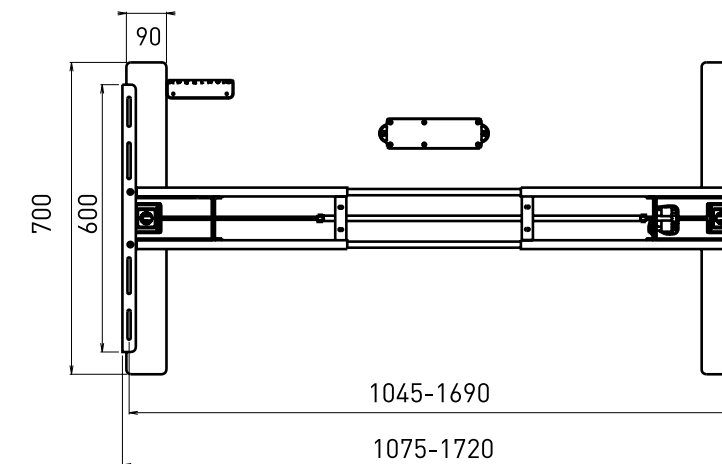

Dimensions overview - top

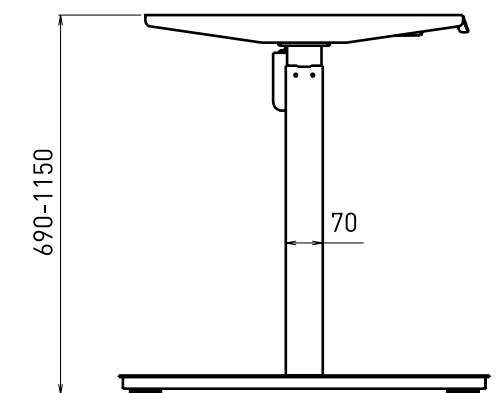

Dimensions overview - side

Packing Information

Dimensions:	1075 (l) * 315 (w) * 245 (h) mm
Net weight:	27,6 kg
Gross weight:	29,6 kg
Container quantities:	- 20 GP / 256 sets
	- 40 GP / 576 sets
	- 40 HC / 648 sets

AK02YJYT-AJ

Single motor desk frame



Parameters

		
Noise level	Input	Warranty period
50 db	110 - 230V	5 years


Leg orientation:	square
Height adjustable range:	690 - 1080 mm
Frame adjustable size:	width (1075 - 1800) * depth (600) mm
Suitable table top size:	width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity:	100 kg
Foot length:	700 mm
Max. speed:	25 mm/s


Black
(RAL9005)



White
(RAL9010)


Aluminum
(RAL9006)


Product Sizes

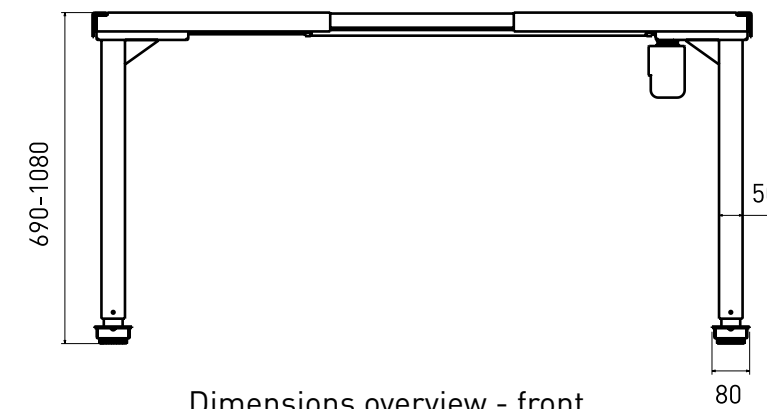

Dimensions overview - front

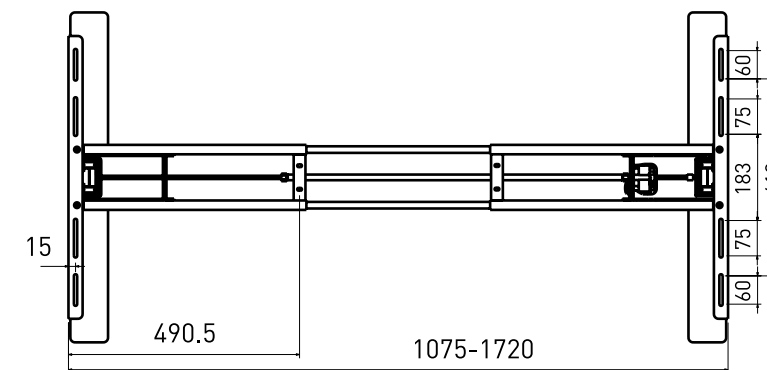

Dimensions overview - top

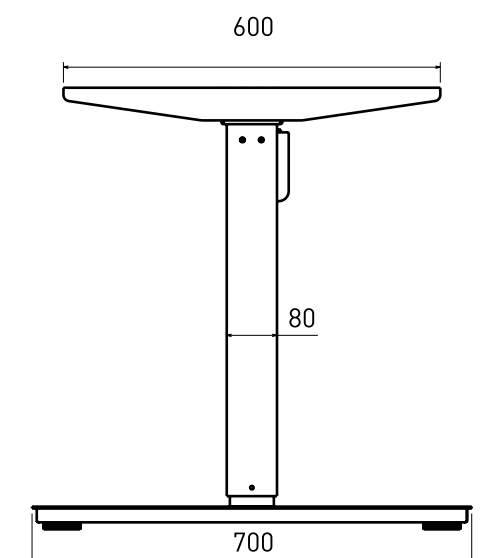

Dimensions overview - side

Packing Information

Dimensions:	1075 (l) * 315 (w) * 245 (h) mm
Net weight:	27,6 kg
Gross weight:	29,6 kg
Container quantities:	- 20 GP / 256 sets - 40 GP / 576 sets - 40 HC / 648 sets

4

DUAL MOTOR MODELS

AK2YJRT-ZF3	27
AK2YJRT-DF3	29
AK2YJRT-ZB3	31
AK2YJRT-DB3	33
AK2YJRT-ZY3	35



AK2YJRT-ZF3

Dual motor desk frame

www.nbaoke.com | www.aoke-europe.com



Parameters



Noise level
50 db



Input
110 - 230V



Warranty period
5 years

Leg orientation: square
Height adjustable range: 625 - 1275 mm
Frame adjustable size: width (1075 - 1800) * depth (600) mm
Suitable table top size: width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity: 120 kg
Foot length: 700 mm
Max. speed: 40 mm/s



Black
(RAL9005)




White
(RAL9010)




Aluminum
(RAL9006)


Product Sizes

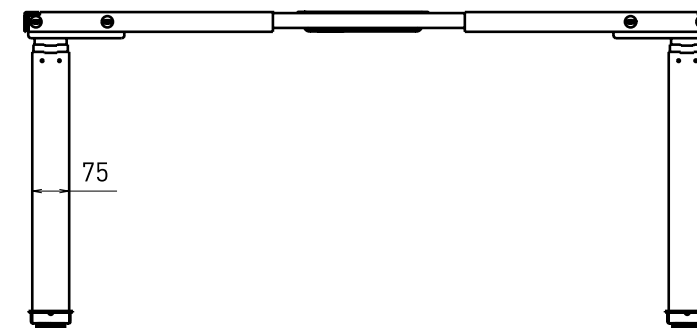

Dimensions overview - front

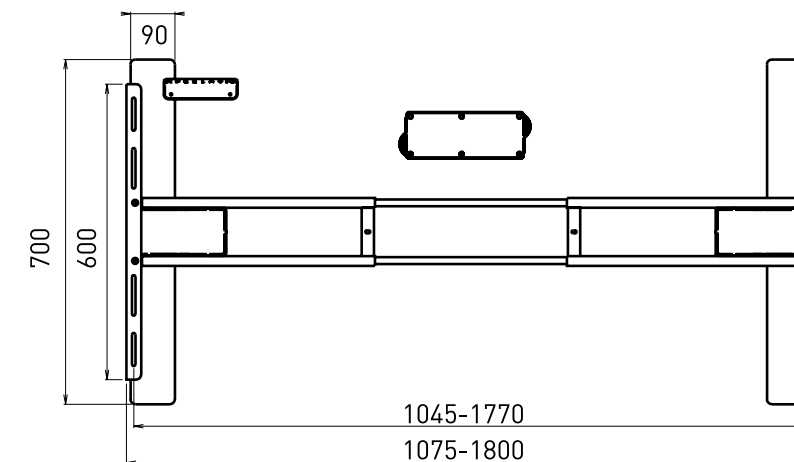

Dimensions overview - top

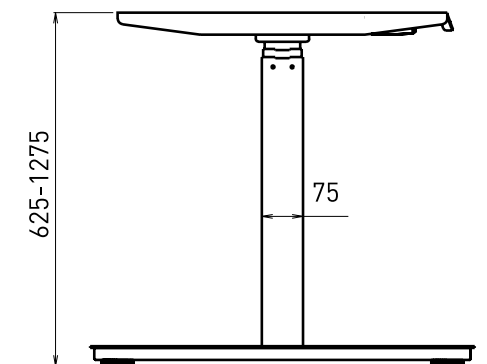

Dimensions overview - side

Packing Information

Dimensions: 1075 (l) * 315 (w) * 220 (h) mm
Net weight: 30,5 kg
Gross weight: 32,5 kg
Container quantities: - 20 GP / 288 sets
- 40 GP / 648 sets
- 40 HC / 720 sets

AK2YJRT-DF3

Dual motor desk frame

www.nbaoke.com | www.aoke-europe.com



Parameters

		
Noise level	Input	Warranty period
50 db	110 - 230V	5 years


Leg orientation:	square
Height adjustable range:	625 - 1275 mm
Frame adjustable size:	width (1075 - 1800) * depth (600) mm
Suitable table top size:	width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity:	120 kg
Foot length:	700 mm
Max. speed:	40 mm/s


Black
(RAL9005)



White
(RAL9010)


Aluminum
(RAL9006)


Product Sizes

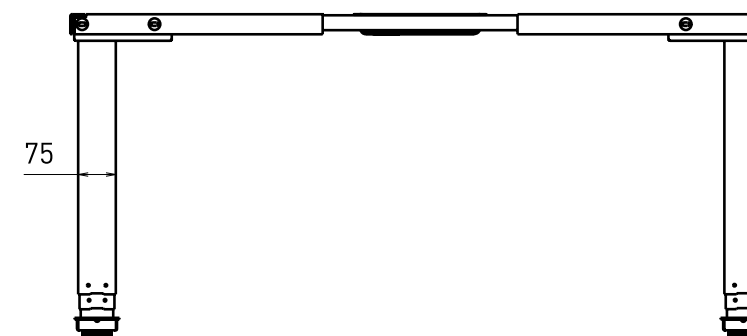

Dimensions overview - front

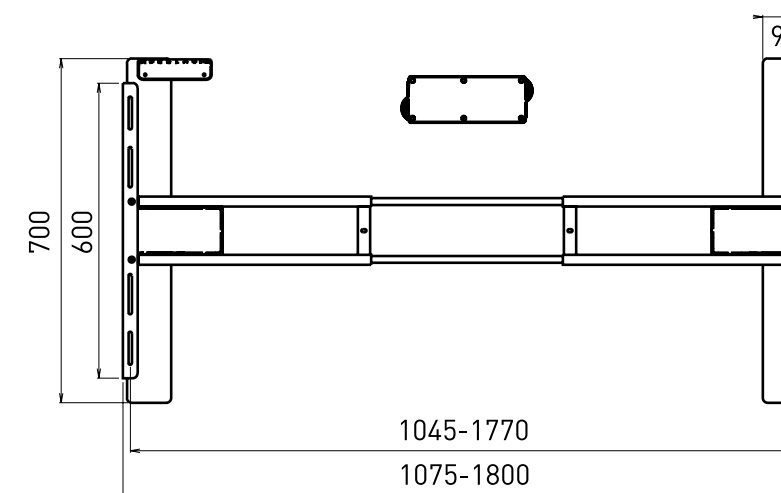

Dimensions overview - top

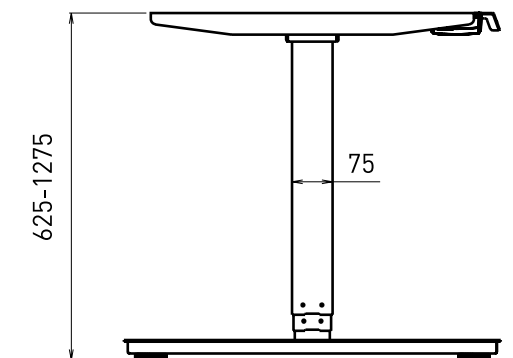

Dimensions overview - side

Packing Information

Dimensions:	1075 (l) * 315 (w) * 220 (h) mm
Net weight:	30,5 kg
Gross weight:	32,5 kg
Container quantities:	- 20 GP / 288 sets
	- 40 GP / 648 sets
	- 40 HC / 720 sets

AK2YJRT-ZB3

Dual motor desk frame

www.nbaoke.com | www.aoke-europe.com



Parameters



Noise level
50 db



Input
110 - 230V



Warranty period
5 years

Leg orientation: rectangular
Height adjustable range: 625 - 1275 mm
Frame adjustable size: width (1075 - 1800) * depth (600) mm
Suitable table top size: width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity: 120 kg
Foot length: 700 mm
Max. speed: 40 mm/s



Black
(RAL9005)




White
(RAL9010)




Aluminum
(RAL9006)


Product Sizes

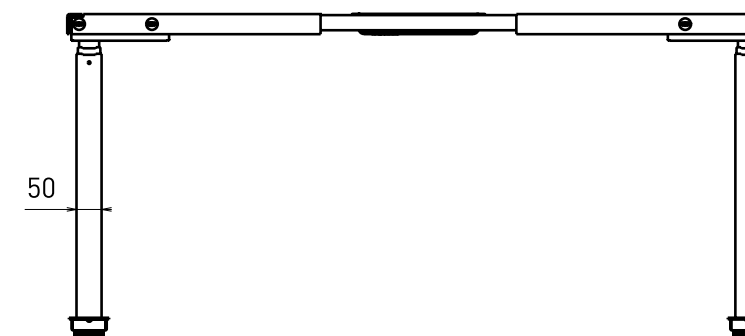

Dimensions overview - front

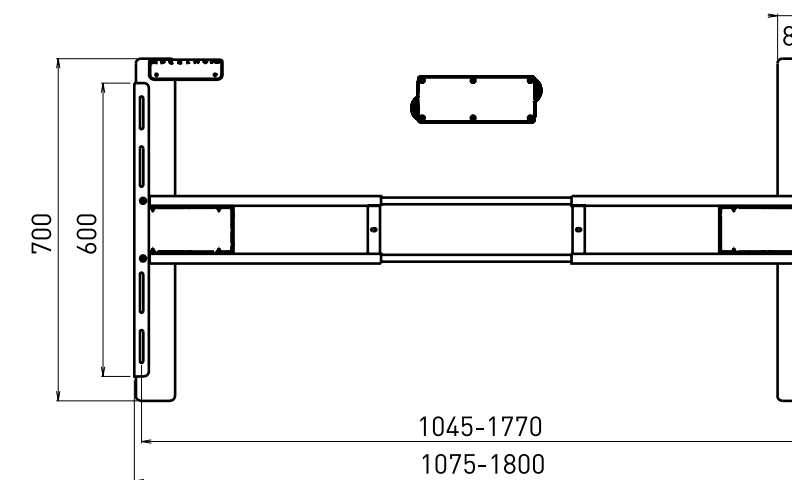

Dimensions overview - top

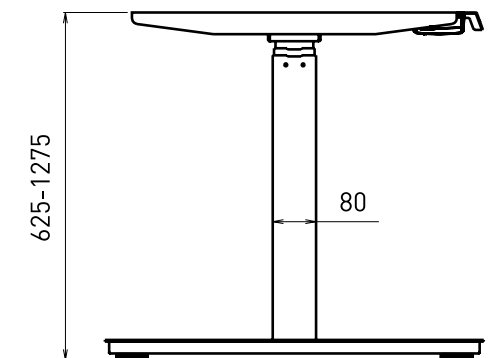

Dimensions overview - side

Packing Information

Dimensions: 1075 (l) * 315 (w) * 220 (h) mm
Net weight: 29,5 kg
Gross weight: 31,5 kg
Container quantities: - 20 GP / 288 sets
- 40 GP / 648 sets
- 40 HC / 720 sets

AK2YJRT-DB3

Dual motor desk frame

www.nbaoke.com | www.aoke-europe.com



Parameters

		
Noise level	Input	Warranty period
50 db	110 - 230V	5 years


Leg orientation:	rectangular
Height adjustable range:	625 - 1275 mm
Frame adjustable size:	width (1075 - 1800) * depth (600) mm
Suitable table top size:	width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity:	120 kg
Foot length:	700 mm
Max. speed:	40 mm/s

 Black
(RAL9005)


 White
(RAL9010)

 Aluminum
(RAL9006)


Product Sizes

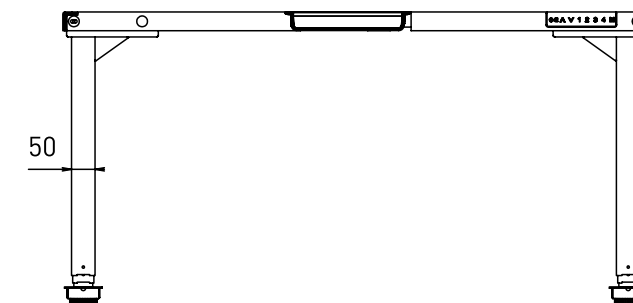

Dimensions overview - front

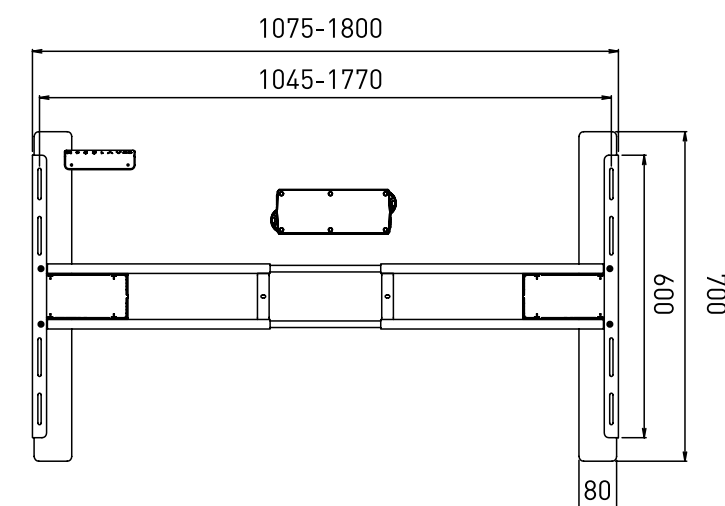

Dimensions overview - top

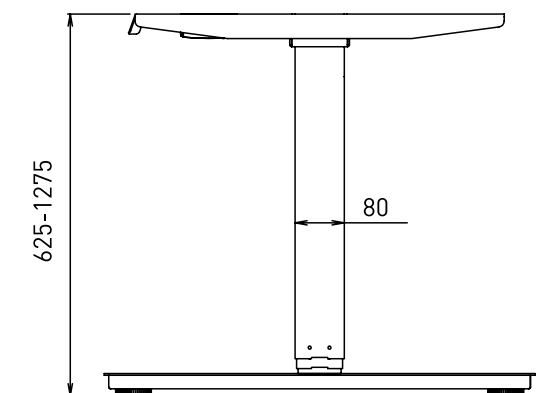

Dimensions overview - side

Packing Information

Dimensions:	1075 (l) * 315 (w) * 220 (h) mm
Net weight:	30 kg
Gross weight:	32 kg
Container quantities:	- 20 GP / 288 sets
	- 40 GP / 648 sets
	- 40 HC / 720 sets

AK2YJRT-ZY3

Dual motor desk frame

www.nbaoke.com | www.aoke-europe.com



Parameters

		
Noise level	Input	Warranty period
50 db	110 - 230V	5 years


Leg orientation:	round
Height adjustable range:	625 - 1275 mm
Frame adjustable size:	width (1075 - 1800) * depth (600) mm
Suitable table top size:	width (1200 - 2000) * depth (700 - 800) mm
Max. lifting capacity:	120 kg
Foot length:	700 mm
Max. speed:	40 mm/s


Black
(RAL9005)



White
(RAL9010)


Aluminum
(RAL9006)


Product Sizes

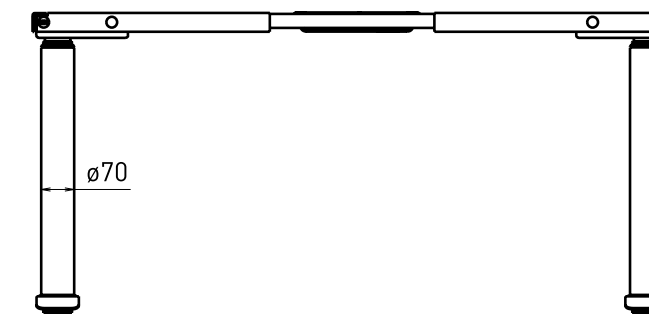

Dimensions overview - front

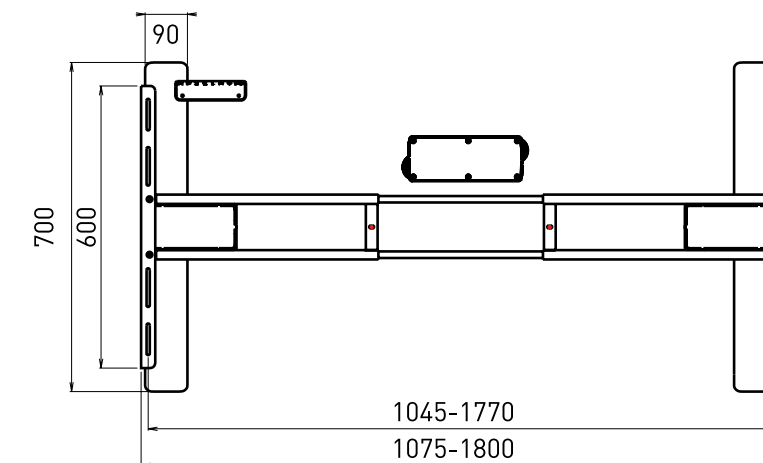

Dimensions overview - top

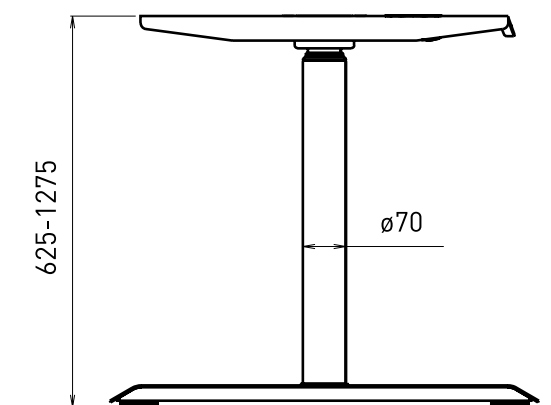

Dimensions overview - side

Packing Information

Dimensions:	1075 (l) * 315 (w) * 220 (h) mm
Net weight:	28,5 kg
Gross weight:	30,5 kg
Container quantities:	- 20 GP / 288 sets
	- 40 GP / 648 sets
	- 40 HC / 720 sets

5

TRIPLE MOTOR MODELS

AK3YJRT-ZF3 90°	39
AK3YJRT-ZF3 120°	41
AK3YJRT-ZF3 180°	43



AK3YJRT-ZF3 90°

Triple leg 90° desk frame


www.nbaoke.com | www.aoke-europe.com



Parameters

				
Noise level	Input	Warranty period	Smart products	Black
50 db	110 - 230V	5 years	Synchronous lifting	(RAL9005)
Leg orientation:	square			
Height adjustable range:	625-1275 mm			White
Frame adjustable size:	width (1075-1800) + (1078-1803) * depth (600) mm			(RAL9010)
Suitable table top size:	width (1200-1900 * 1200-1900) * depth (700-800) mm			
Max. lifting capacity:	150 kg			Aluminum
Foot length:	700 mm			(RAL9006)
Max. speed:	38 mm/s			

Product Sizes

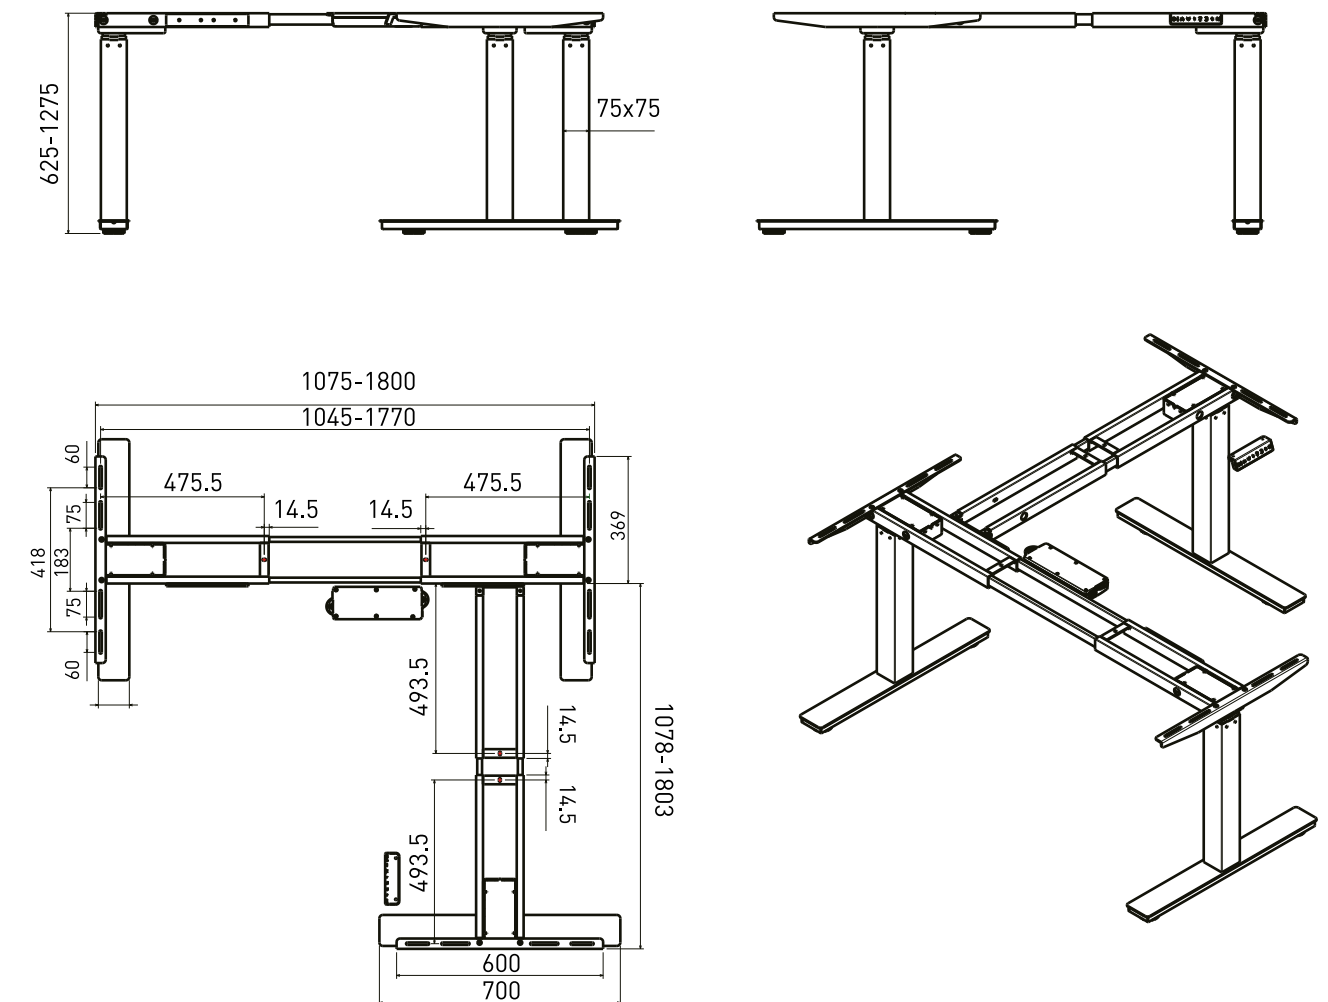

Packing Information

Dimensions:	box 1/2: 875 (l) * 475 (w) * 140 (h) mm
	box 2/2: 1375 (l) * 315 (w) * 195 (h) mm
Net weight:	46,5 kg
Gross weight:	50 kg
Container quantities:	- 20 GP / 140 sets
	- 40 GP / 294 sets
	- 40 HC / 336 sets

AK3YJRT-ZF3 120°


Triple leg 120° desk frame



Parameters

				
Noise level	Input	Warranty period	Smart products	Black
50 db	110 - 230V	5 years	Synchronous lifting	(RAL9005)
Leg orientation:	square			
Height adjustable range:	625-1275 mm			White
Frame adjustable size:	width (1100-1700) + (1100-1700) * depth (600) mm			(RAL9010)
Suitable table top size:	width (1300-1900 * 1300-1900) * depth (650-800) mm			
Max. lifting capacity:	150 kg			Aluminum
Foot length:	700 mm			(RAL9006)
Max. speed:	38 mm/s			

Product Sizes

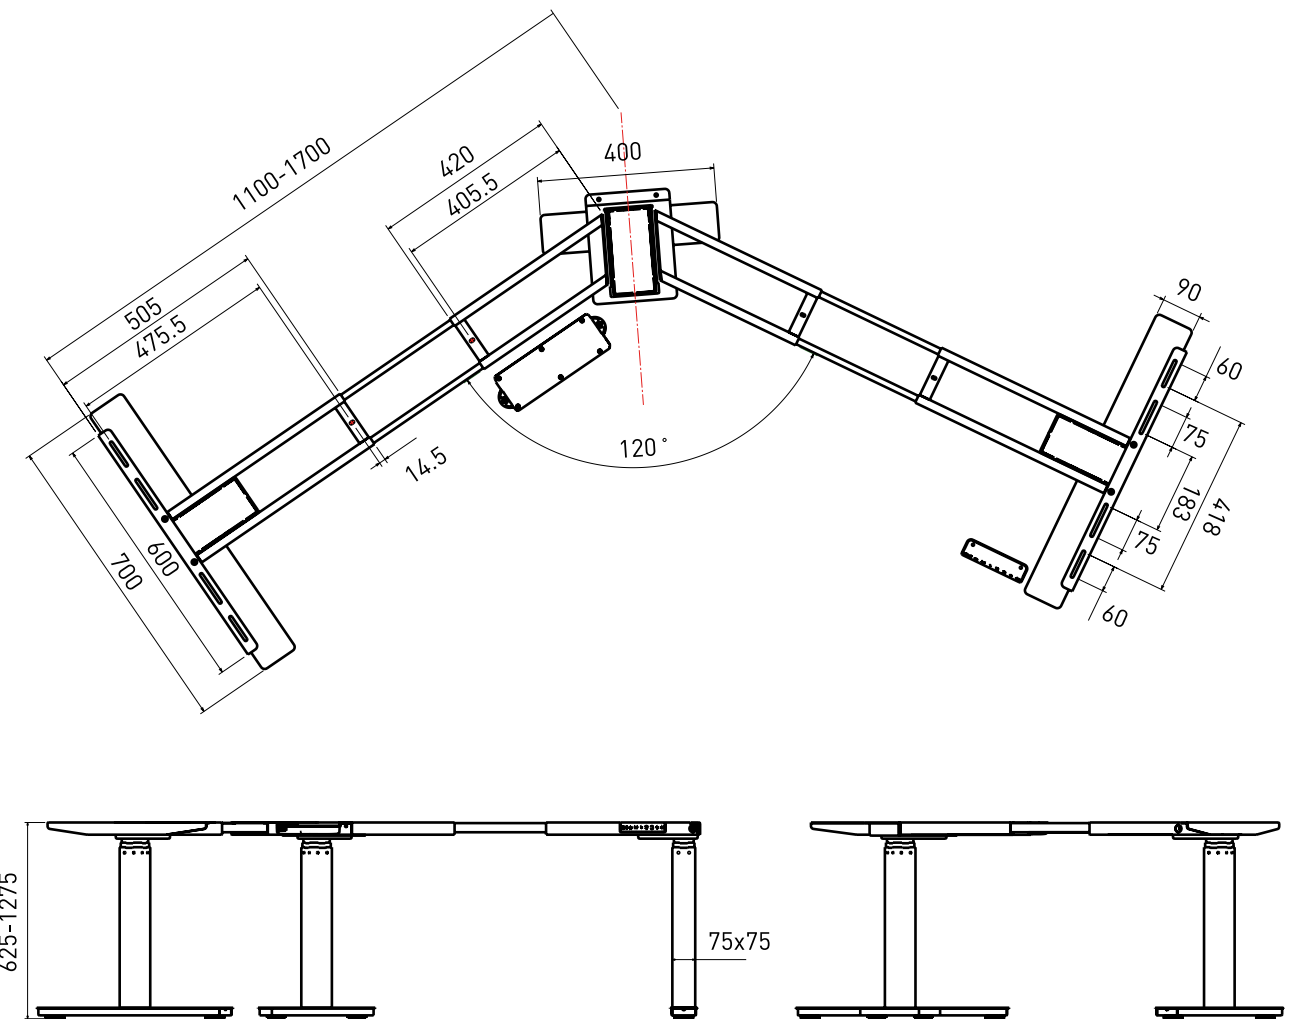

Packing Information

Dimensions:	box 1/2: 875 (l) * 475 (w) * 140 (h) mm
	box 2/2: 1075 (l) * 395 (w) * 195 (h) mm
Net weight:	46,5 kg
Gross weight:	50 kg
Container quantities:	- 20 GP / 140 sets
	- 40 GP / 294 sets
	- 40 HC / 336 sets

AK3YJRT-ZF3 180°

Triple leg 180° meeting table frame


www.nbaoke.com | www.aoke-europe.com



Parameters

				
Noise level	Input	Warranty period	Smart products	Black
50 db	110 - 230V	5 years	Synchronous lifting	(RAL9005)
Leg orientation:	square			
Height adjustable range:	625 - 1275 mm			White
Frame adjustable size:	width (2000 - 3200) * depth (900) mm			(RAL9010)
Suitable table top size:	width (2100 - 3300) * depth (950 - 1200) mm			
Max. lifting capacity:	150 kg			Aluminum
Foot length:	900 mm			(RAL9006)
Max. speed:	38 mm/s			

Product Sizes

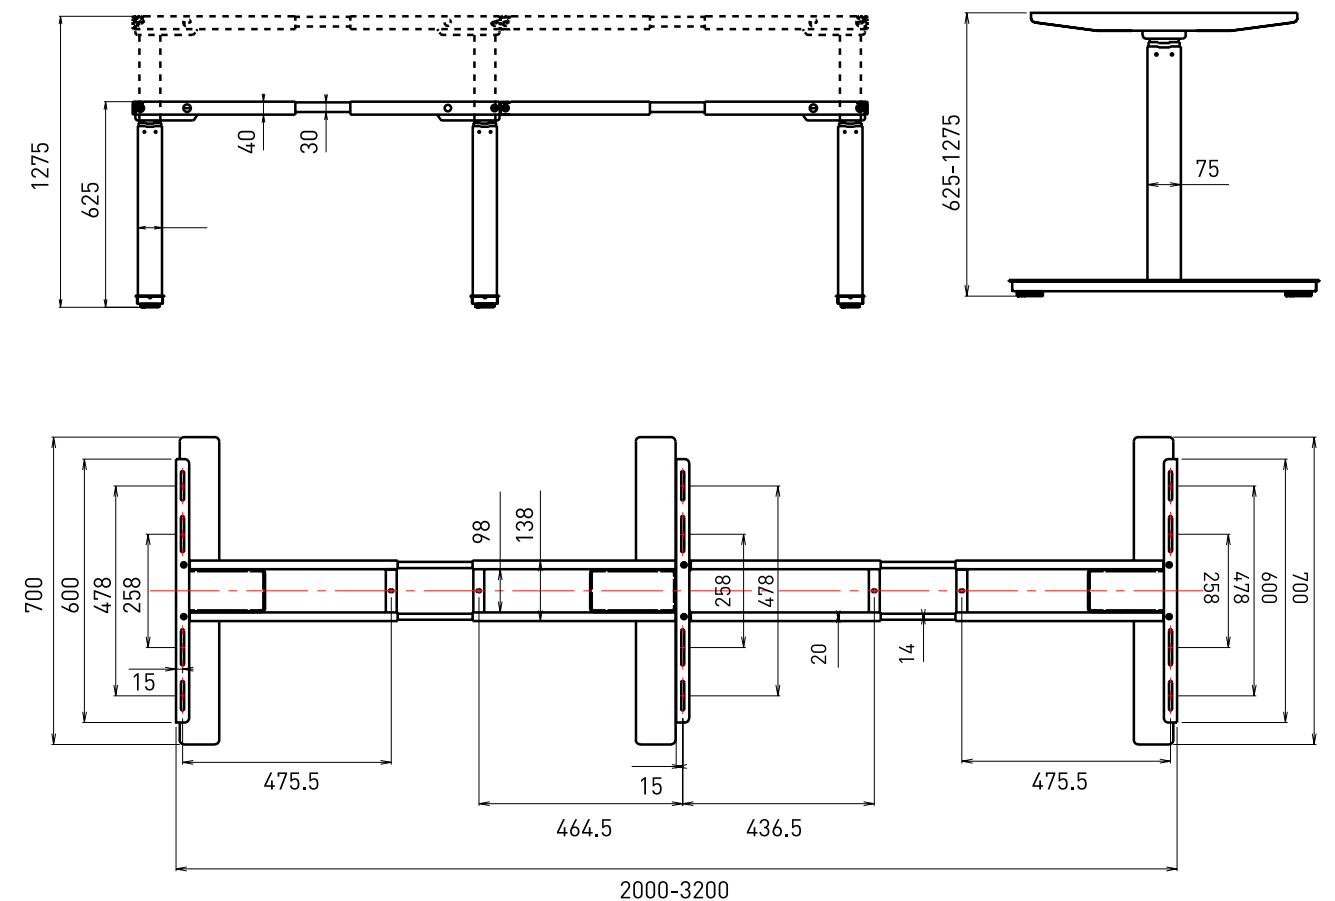

Packing Information

Dimensions:	box 1/2: 875 (l) * 475 (w) * 140 (h) mm
	box 2/2: 1055 (l) * 365 (w) * 195 (h) mm
Net weight:	52,5 kg
Gross weight:	56 kg
Container quantities:	- 20 GP / 140 sets
	- 40 GP / 294 sets
	- 40 HC / 336 sets

6

BENCHES

(AK2YJRT-ZB3)X2	47
(AK02YJHT-A-L)X2	49
(AK02YJHT-A-H)X2	51







(AK2YJRT-ZB3)X2

Bench workstation frame

www.nbaoke.com | www.aoke-europe.com



Product Sizes

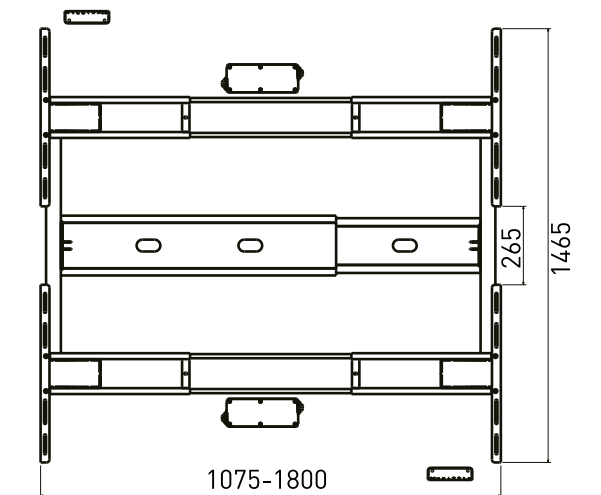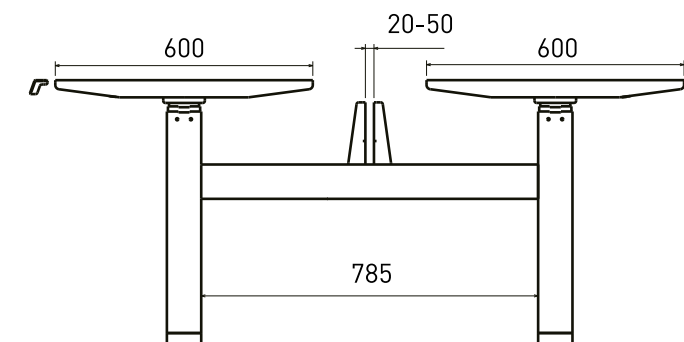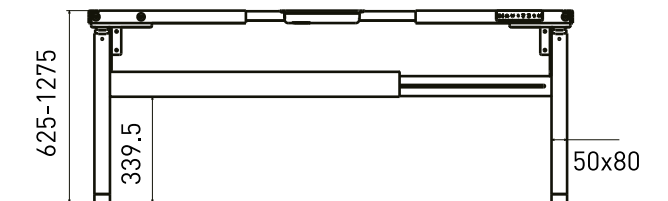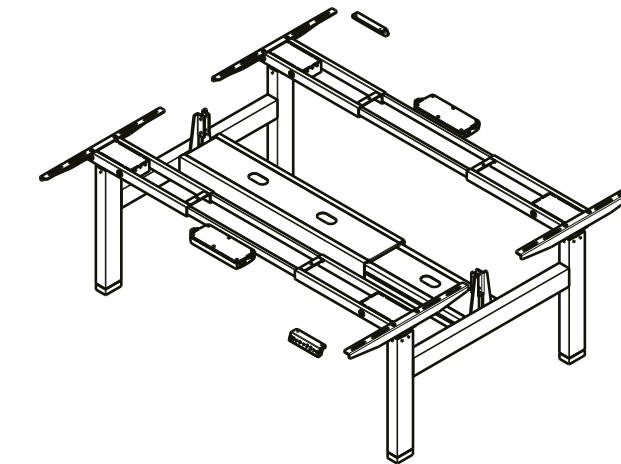

Parameters



Noise level
50 db



Input
110 - 230V



Warranty period
5 years



Smart combination
Synchronous lifting



Black
(RAL9005)



White
(RAL9010)



Aluminum
(RAL9006)

Leg orientation: rectangular
Height adjustable range: 625 - 1275 mm
Frame adjustable size: width (1075 - 1800) * depth (600) mm
Suitable table top size: width (1200 - 1900) * depth (700 - 800) mm
Max. lifting capacity: 120 kg (per side)
Foot type: Plastic foot pad
Max. speed: 40 mm/s

Packing Information

Dimensions: box 1/3: 1075 (l) * 315 (w) * 275 (h) mm
box 2/3: 1075 (l) * 315 (w) * 275 (h) mm
box 3/3: 1105 (l) * 465 (w) * 130 (h) mm
Net weight: 66 kg
Gross weight: 72 kg
Container quantities: - 20 GP / 90 sets
- 40 GP / 193 sets
- 40 HC / 210 sets

(AK02YJHT-A-L)X2

Bench workstation frame

www.nbaoke.com | www.aoke-europe.com



Parameters



Noise level
50 db



Warranty period
5 years



Manually adjustable
by hand crank



Black
(RAL9005)







White
(RAL9010)



Aluminum
(RAL9006)

Leg orientation: rectangular
Height adjustable range: 565 - 845 mm
Frame adjustable size: width (1150 - 1800) * depth (600) mm
Suitable table top size: width (1300 - 1900) * depth (700 - 800) mm
Max. lifting capacity: 80 kg (per side)
Foot type: Plastic foot pad
Max. speed: 8 mm/turn

Product Sizes

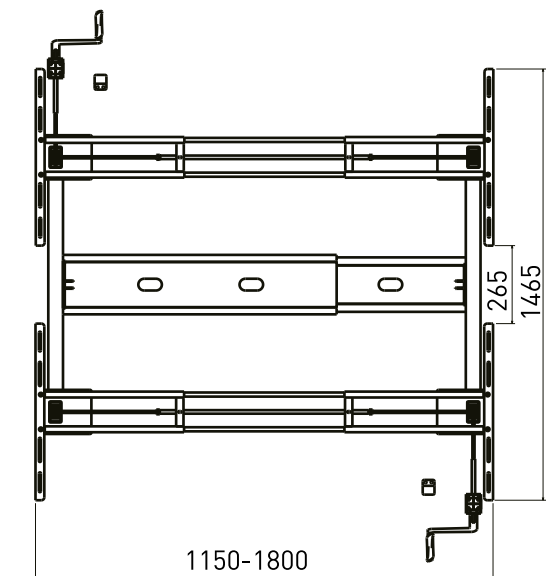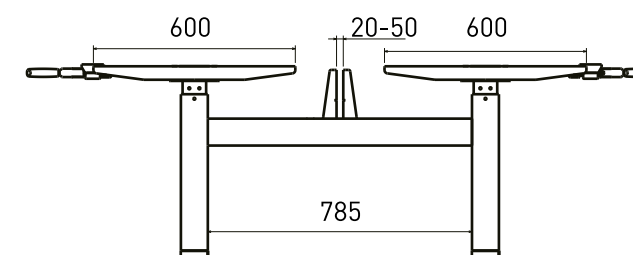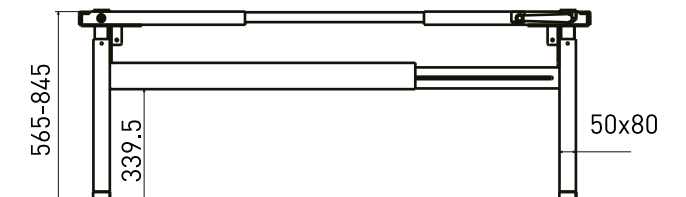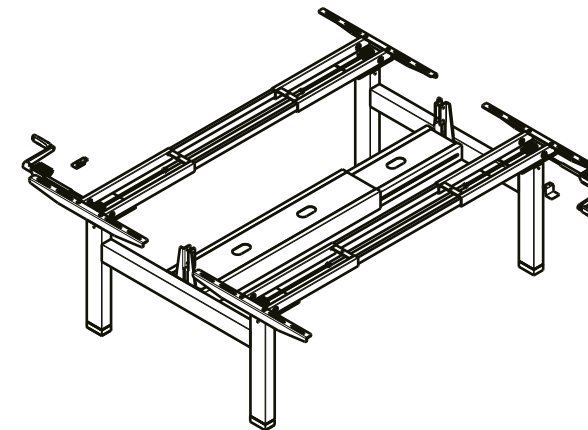

Packing Information

Dimensions: box 1/3: 1075 (l) * 315 (w) * 275 (h) mm
box 2/3: 1075 (l) * 315 (w) * 275 (h) mm
box 3/3: 1105 (l) * 465 (w) * 130 (h) mm
Net weight: 58 kg
Gross weight: 63 kg
Container quantities: - 20 GP / 90 sets
- 40 GP / 193 sets
- 40 HC / 210 sets

(AK02YJHT-A-H)X2

Bench workstation frame

www.nbaoke.com | www.aoke-europe.com



Parameters



Noise level
50 db



Warranty period
5 years



Manually adjustable
by hand crank



Black
(RAL9005)




White
(RAL9010)



Aluminum
(RAL9006)

Leg orientation: rectangular
Height adjustable range: 670 - 1120 mm
Frame adjustable size: width (1150 - 1800) * depth (600) mm
Suitable table top size: width (1300 - 1900) * depth (650 - 800) mm
Max. lifting capacity: 80 kg (per side)
Foot type: Plastic foot pad
Max. speed: 8 mm/turn

Product Sizes

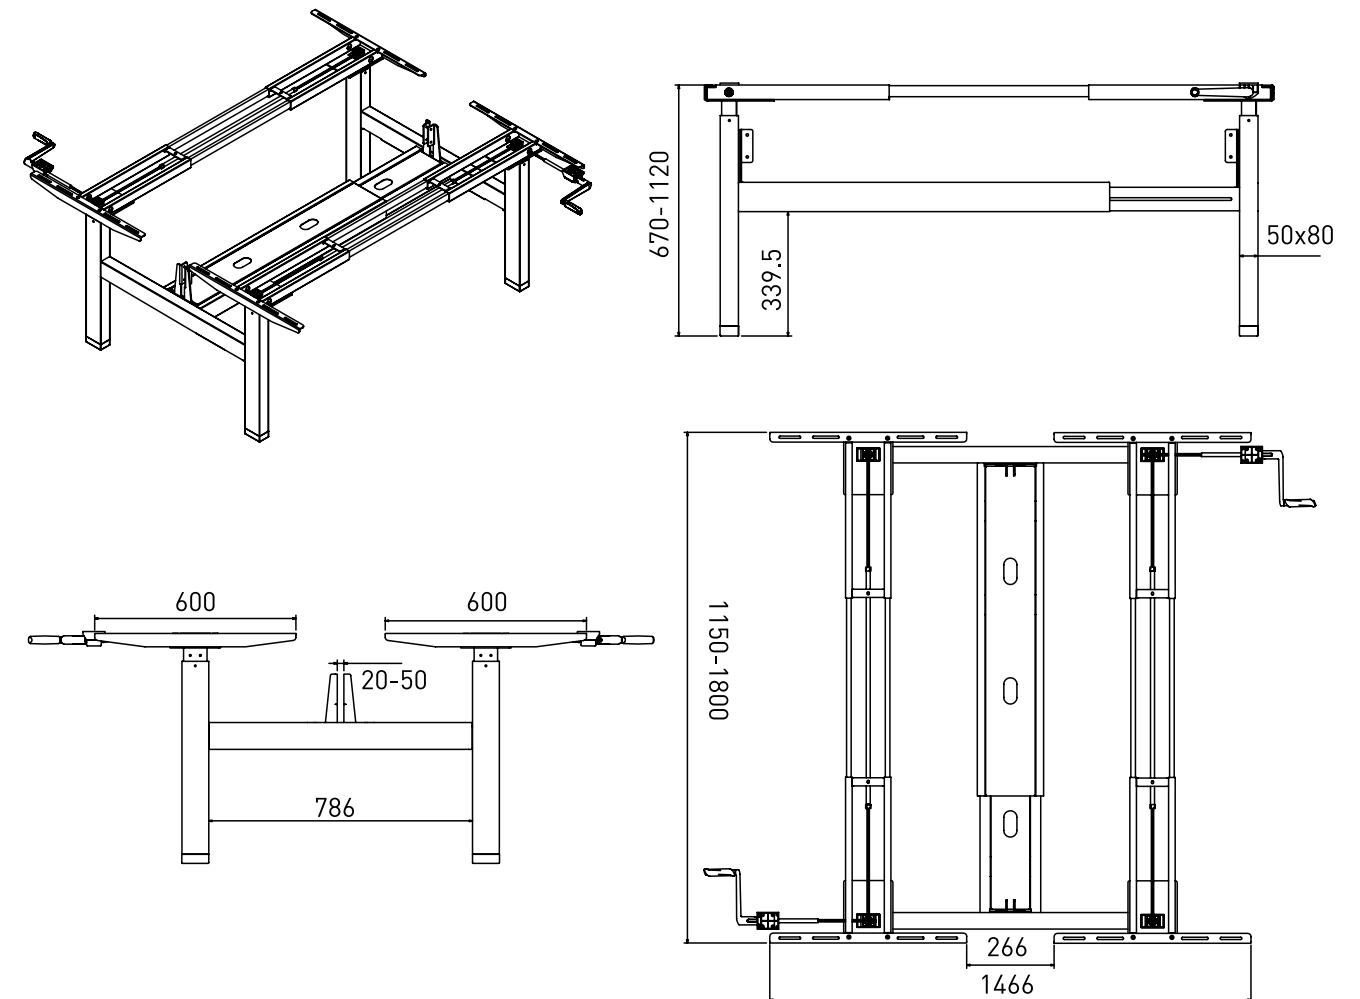

Packing Information

Dimensions: box 1/3: 1075 (l) * 315 (w) * 275 (h) mm
box 2/3: 1075 (l) * 315 (w) * 275 (h) mm
box 3/3: 1105 (l) * 465 (w) * 130 (h) mm
Net weight: 42 kg
Gross weight: 46 kg
Container quantities: - 20 GP / 90 sets
- 40 GP / 193 sets
- 40 HC / 210 sets

7

CRANK DESKS

AK02YJHT-AJ	55
AK02YJHT-A	57



AK02YJHT-AJ

Manually operated desk frame

www.nbaoke.com | www.aoke-europe.com



AK02YJHT-AJ-L



AK02YJHT-AJ-H

Parameters



Noise level
50 db



Warranty period
5 years

Leg orientation: rectangular
Height adjustable range: 575 - 855 mm (L) | 680 - 1130 mm (H)
Frame adjustable size: width (1150 - 1800) * depth (600) mm
Suitable table top size: width (1300 - 1900) * depth (700 - 800) mm
Max. lifting capacity: 80 kg
Foot length: 700 mm
Max. speed: 8 mm/turn



Black
(RAL9005)






White
(RAL9010)



Aluminum
(RAL9006)

Product Sizes

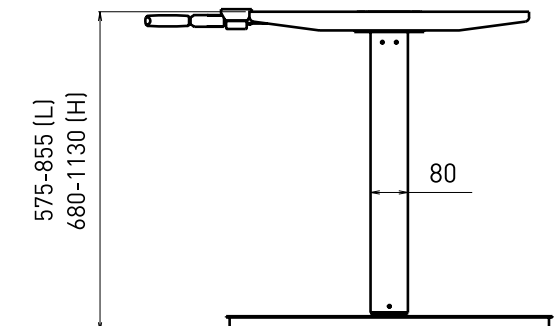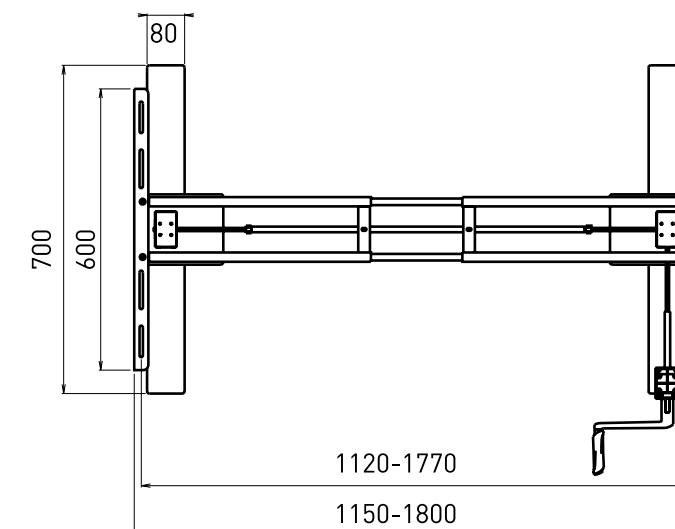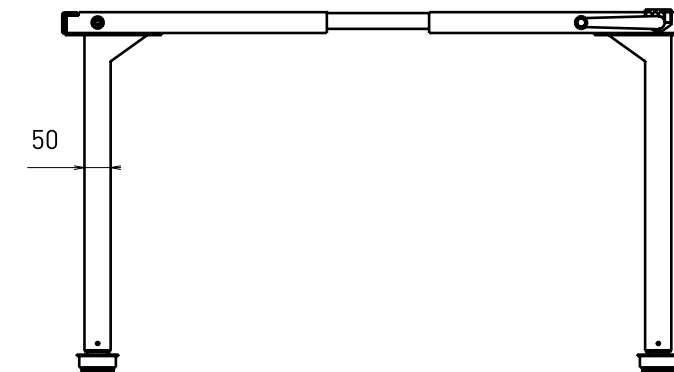

Packing Information

Dimensions: 1075 (l) * 315 (w) * 245 (h) mm
Net weight: 24,5 kg
Gross weight: 26,5 kg
Container quantities: - 20 GP / 256 sets
- 40 GP / 576 sets
- 40 HC / 648 sets

AK02YJHT-A

Manually operated desk frame

www.nbaoke.com | www.aoke-europe.com



AK02YJHT-A-L



AK02YJHT-A-H

Parameters



Noise level
50 db



Warranty period
5 years

Leg orientation: rectangular
Height adjustable range: 575 - 855 mm (L) | 680 - 1130 mm (H)
Frame adjustable size: width (1150 - 1800) * depth (600) mm
Suitable table top size: width (1300 - 1900) * depth (650 - 800) mm
Max. lifting capacity: 80 kg
Foot length: 700 mm
Max. speed: 8 mm/turn



Black
(RAL9005)






White
(RAL9010)



Aluminum
(RAL9006)

Product Sizes

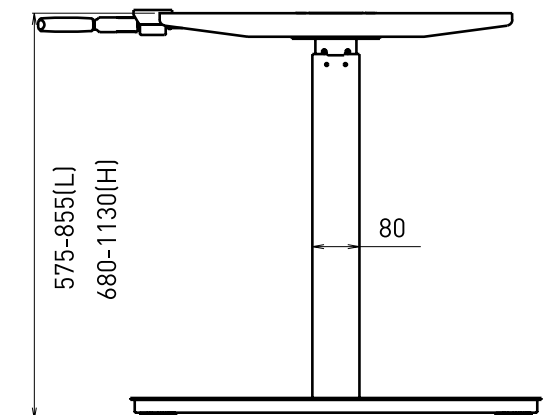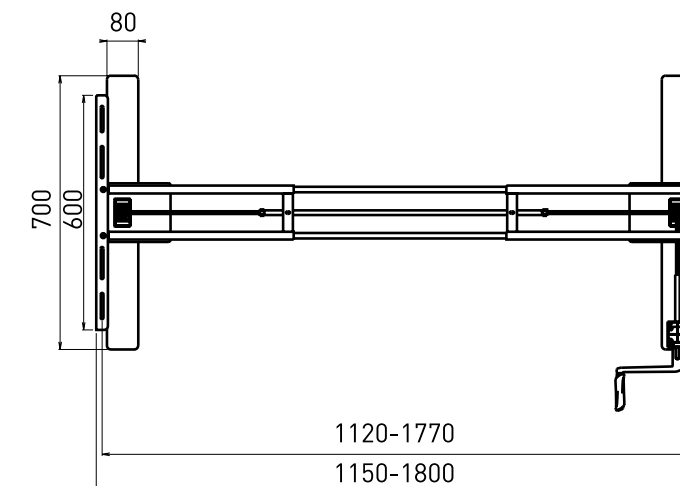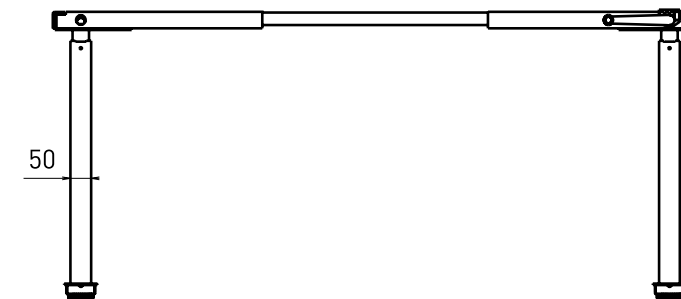

Packing Information

Dimensions: 1075 (l) * 315 (w) * 245 (h) mm
Net weight: 29 kg
Gross weight: 31 kg
Container quantities: - 20 GP / 256 sets
- 40 GP / 576 sets
- 40 HC / 648 sets

8

ACCESSORIES

MONITOR ARM	61
- AK-MR01S	
- AK-MR01D	
OTHER ACCESSORIES	63
- IRON CABINETS	
- OPTIONAL PARTS	
UNIVERSAL CPU HOLDER	65
PERSONAL DRAWER	66

FREE HEIGHT REGULATION



AK-MR01S

Single monitor arm



Easy & quick fixation



Easy & quick
desktop connection

Parameters

Suitable monitor size: 14" - 32"
 Rotation angle: 360°
 Height adjustable range: 320 mm
 Weight capacity: 2,5 - 8 kg
 Material: steel & aluminum
 Color: aluminum, white & black



Height adjustable



360° rotatable screen



Rotatable node parts

AK-MR01D

Double monitor arm



Easy & quick fixation



Easy & quick
desktop connection

Parameters

Suitable monitor size: 14" - 32"
 Rotation angle: 360°
 Height adjustable range: 320 mm
 Weight capacity: 2,5 - 8 kg
 Material: steel & aluminum
 Color: aluminum, white & black



Height adjustable



360° rotatable screen




Rotatable node parts

IRON CABINETS



Standard cabinet size

Disconnect without installation

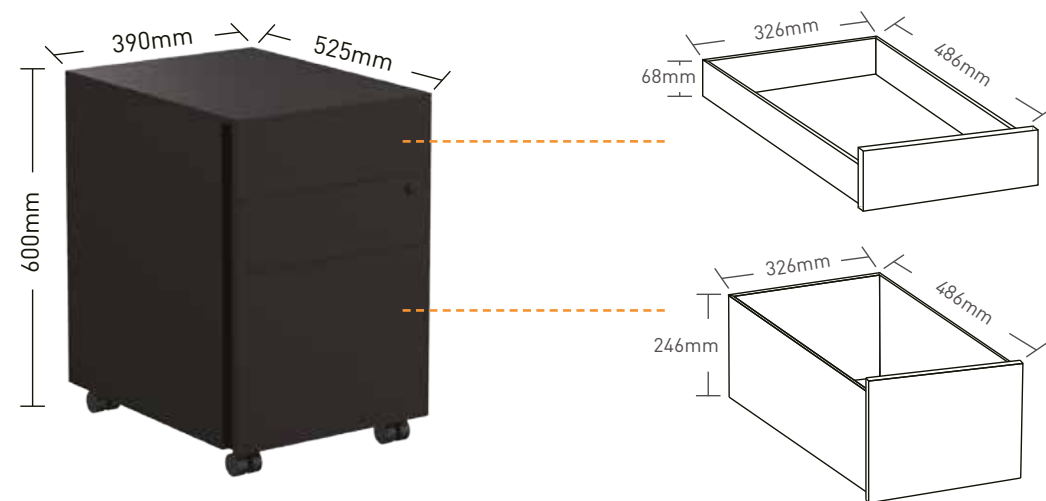


OPTIONAL PARTS

Metal cable tray

The cable tray can effectively hide the power cord. When the table is lifted the cables will remain hidden, which contributes to a better looking office environment.


-Length: 800 mm

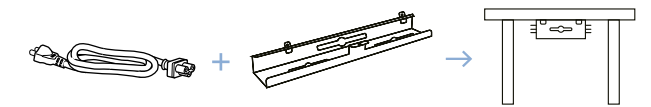

Plastic cable tube


In the office, the power cord is a headache. The chaotic environment makes it impossible for us to work effectively. The snake tube can function as a storage cord and improve the office experience.

-Length: 1280 mm

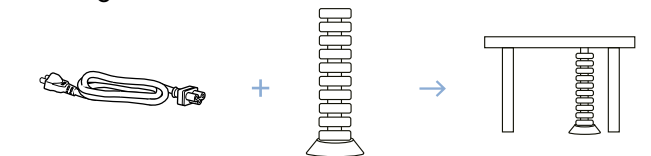

Anti-collision

Collision prevention devices are designed to prevent damage caused by collisions. During the lifting of the table, collisions will be stopped immediately to avoid other damage.

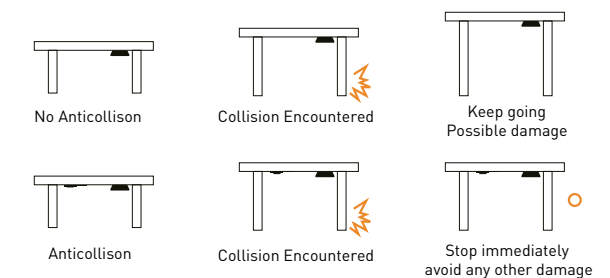

UNIVERSAL CPU HOLDER



► Parameters

Height adjustable: 300 - 455 mm
 Width adjustable: 135 - 245 mm
 Color: aluminum, white & black
 • Depth adjustable
 • Rotatable

PERSONAL DRAWER



► Parameters

Dimensions: 300 (l) * 390 (w) * 90 (h) mm
 Including: pen tray
 Lock: including 2 keys
 Color: aluminum, white & black
 • Telescopic drawer
 • Universal mounting under the table top

9

HANDSETS AND CONTROL BOXES

HANDSETS 69

- TH14

- TDH6

CONTROL BOXES 70

- TC11

- TC15


- TC16





TDH6

* M stands for “memory button”
 * 1/2/3/4 stands for “memory position”

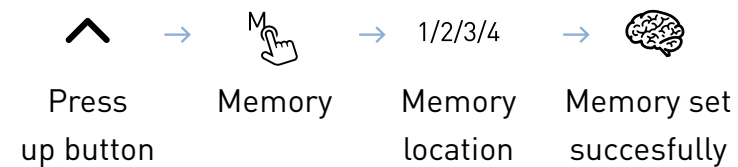

TH14



TC15

Depending on the number of legs a certain control box is needed. It has 0.06W stand-by power consumption and various safety features.


*Cooperation with Taiwanese brand “Timotion”



TC11



TC16

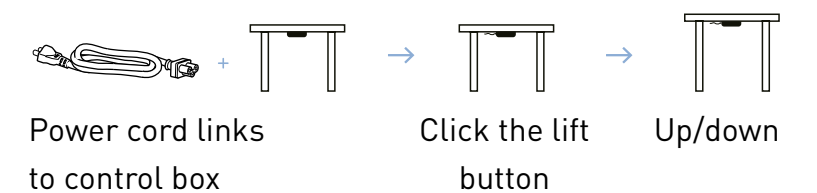

PART SELECTION

Table legs, table feet & table board



Model	ZF3	DF3	ZB3	DB3	ZY3	DY3
Shape	Square		Rectangular		Round	
Column part	33		33		33	
Feature	Narrow top Wide bottom	Wide top Narrow bottom	Narrow top Wide bottom	Wide top Narrow bottom	Narrow top Wide bottom	Wide top Narrow bottom
Stroke	650	650	650	650	650	650

PART SELECTION

Table legs, table feet & table board

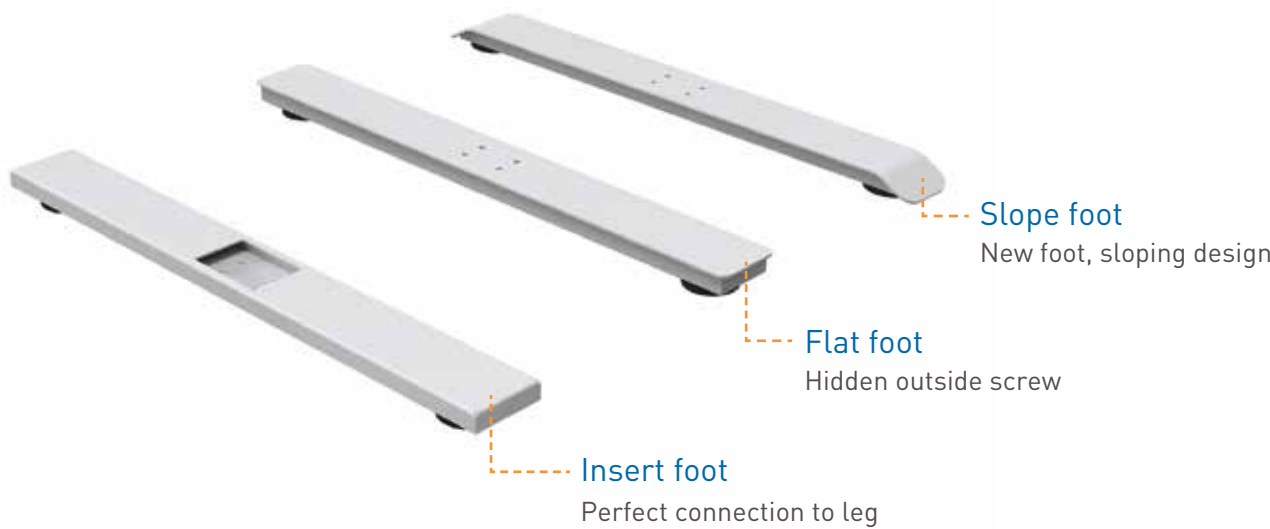


Table board material

We can provide customers with a variety of table material choices for FCL orders. Pictures for reference only. Texture and color difference are based on real products.

Custom table tops

The production of table tops requires the customer to provide correct table information (size, table type, etc.) and requires a certain period of production time.

AOKE FACTORY

 **ADD:** No.160 North Huanzhen Road, Science and
Technology Park Jiangshan Town, Ningbo City
 **TEL:** +86-574-88193751 / +86-574-88193756
 **FAX:** +86-574-88193752
 www.nbaoke.com
www.aokefurniture.com

AOKE OFFICE

 **ADD:** Room 602 Li Shi Business Building, No.82
Taiyuxiang Yinzhou Ningbo 315100 Zhejiang China
 **TEL:** +86-574-88193751
 **EML:** sales_01@aokefurniture.com
 **FAX:** +86-574-88193752
 www.nbaoke.com
www.aokefurniture.com

AOKE EUROPE B.V.

 **ADD:** Edisonweg 10, 6101 XJ Echt, The Netherlands
 **TEL:** +31-45 535 0529
 **EML:** sales@aoke-europe.com
 www.aoke-europe.com

AOKE SOUTHEAST ASIA CO., LTD.

 **ADD:** 15/46 Moo.18 Lam Luk Ka Rd., Khukhot, Lumlukka,
Pathumthani Thailand 12130
 **TEL:** +66- 2035 7029
 **EML:** sale@aokesoutheastasia.com
 www.aokefurniture.com



NBAOKE



AOKE-EUROPE